


ENG

www.castloaders.it

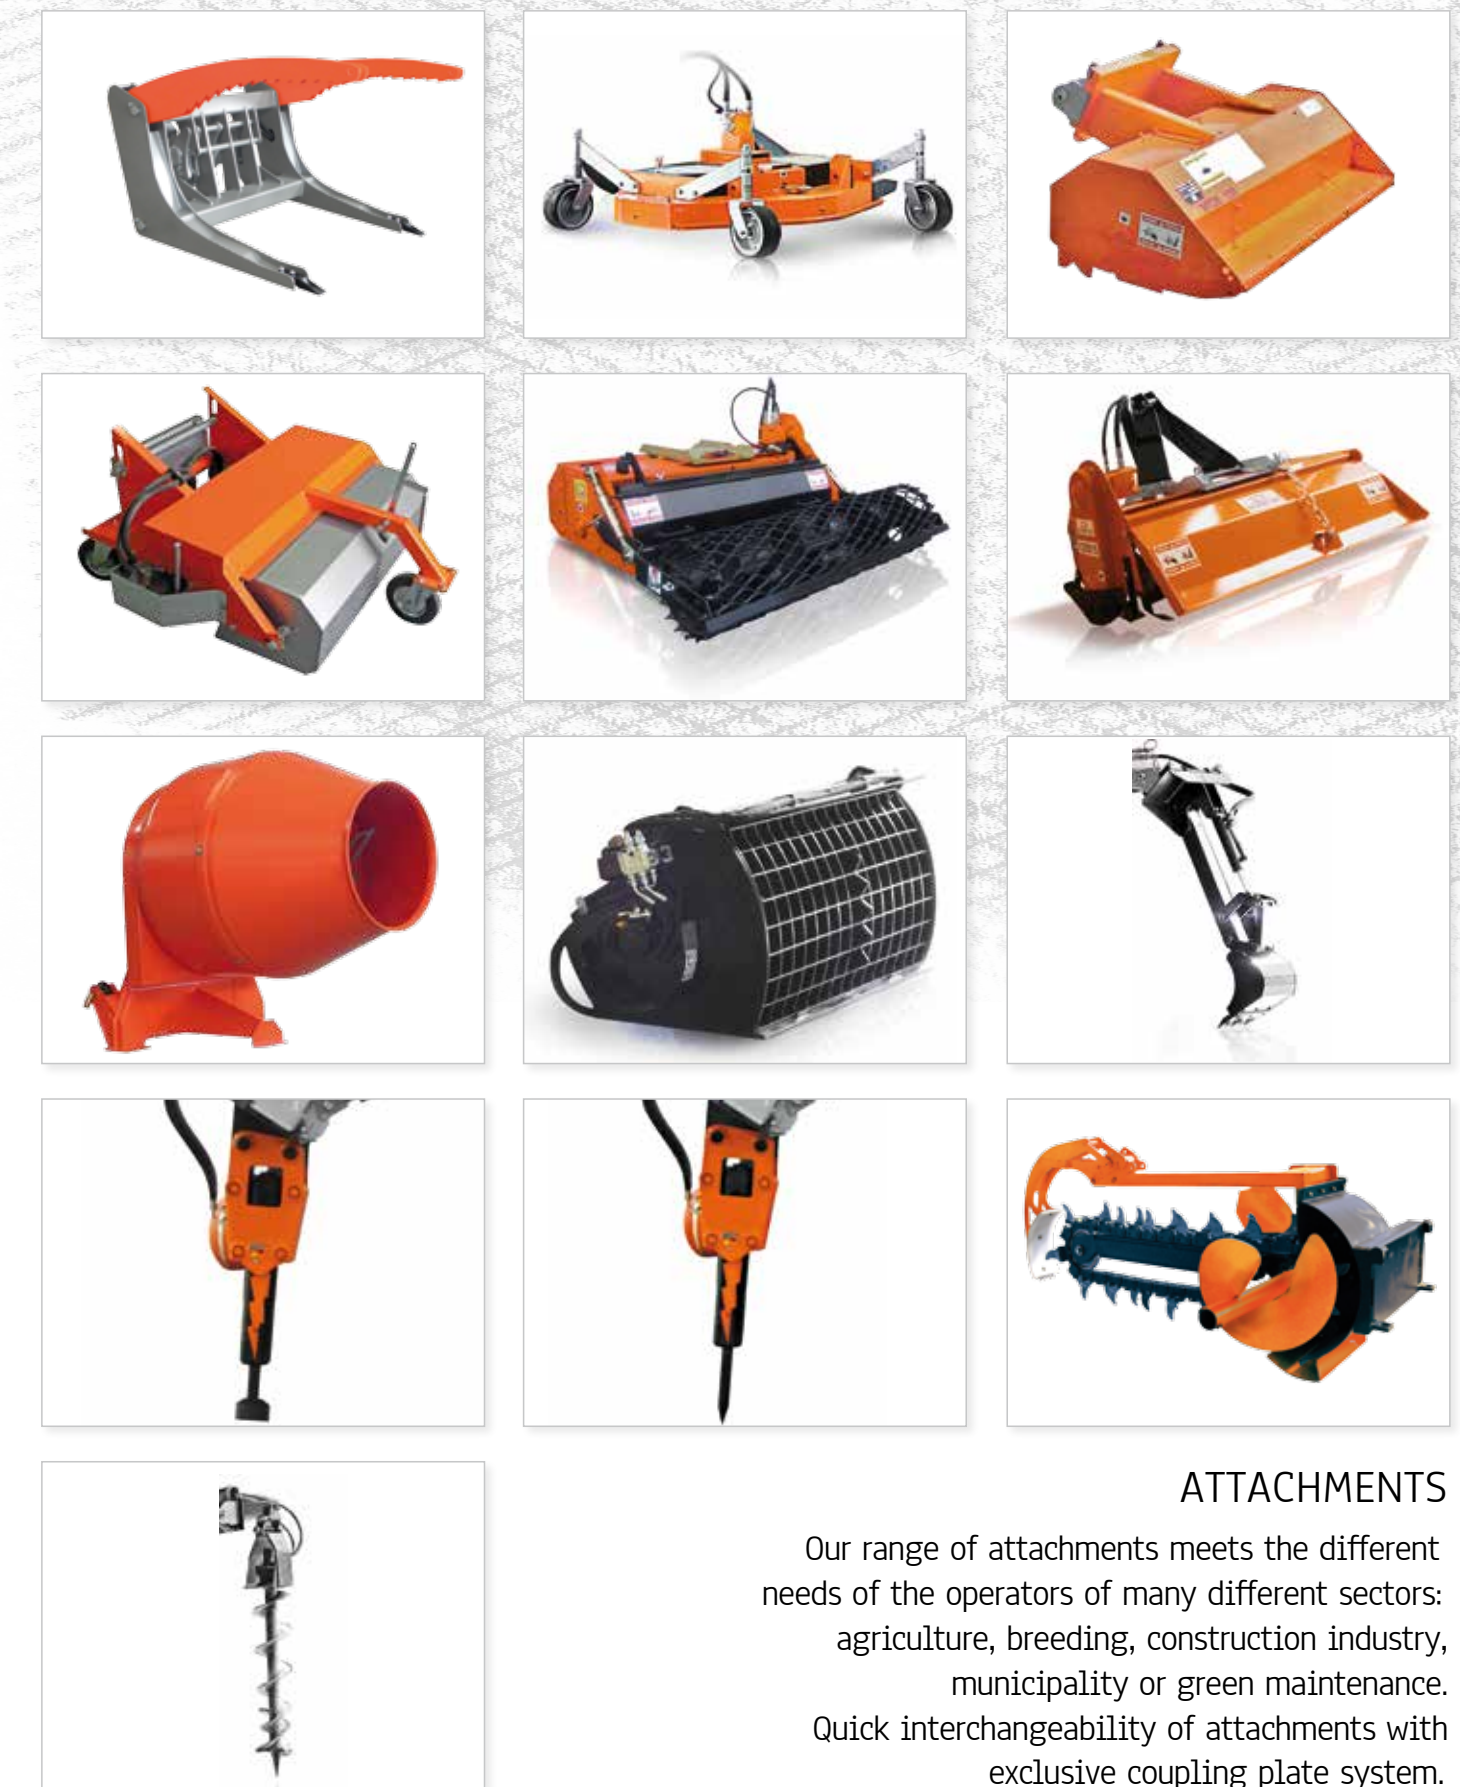

ATTACHMENTS

Our range of attachments meets the different needs of the operators of many different sectors: agriculture, breeding, construction industry, municipality or green maintenance. Quick interchangeability of attachments with exclusive coupling plate system.



CAST GROUP S.r.l. UNIPERSONALE
 Via A. Meucci, 18
 30035 Mirano (VE) Italy
 tel. +39 041 5701827
 info@cast-group.it

Data contained in this document is subject to change without notice and/or notification. Cast Group reserves the right to modify its products without obligation to communications. The images in this document are the only a demonstrative purpose. Selling products may be subject to change in appearance, about accessories, on the technical specifications and for the safety features.

CASTLOADERS

017_1448-3D_2017/ENG

CASTLOADERS

20T/25T

Engine	Diesel Isuzu
Power/cylinders	22Hp/16,3 Kw - 25Hp/18,2 Kw -3 cyl
Cooling	liquid
Transmission	hydrostatic 4WD
Speed	10 km/h
Steering	articulated frame
Differential	manual
Hydraulic outlet	29 l./min. - 34 l./min.
Boom height	mm. 2780
Joystick	standard
Selfleveling	standard
Working lights	2 ant.+ 1 post. (opt. 20T)
Safety protection	ROPS+FOPS
Windscreen	Option
Cab+heating	no
Anti -Stall (AST)	integrated (A.S.T.) not for 20T
Hoods front/rear	steel
Tyres Tractor	23x8.50-12 / 26x12.00-12
Size (WxLxh)	mm.1200x2370x2100
Weight	Kg.1040



CASTLOADERS

35T

Engine	Diesel Isuzu
Power/cylinders	38 Hp. / 28Kw- 3 cylinders
Cooling	liquid
Transmission	hydrostatic - 4WD
Speed	16 km/h
Steering	articulated frame
Differential	manual
Hydraulic outlet	48 l./min. (66 Nordic)
Boom height	mm. 2700
Joystick	option
Selfleveling	option
Working lights	option
Safety protection	ROPS
Windscreen	no
Cab+heating	Option
Anti -Stall (AST)	no
Hoods front/rear	thermof./ steel
Tyres Tractor	26x12.00-12
Size (WxLxh)	mm.1200x2470x2700
Weight	Kg. 1260



CASTLOADERS

41T

Engine	Diesel Isuzu
Power/cylinders	38 Hp. / 28Kw- 3 cylinders
Cooling	liquid
Transmission	hydrostatic - 4WD
Speed	16 km/h
Steering	articulated frame
Differential	electrical
Hydraulic outlet	48 l./min. (66 Nordic)
Boom height	mm. 2700
Joystick	standard
Selfleveling	standard
Working lights	2 front+ 1 rear
Safety protection	ROPS+FOPS
Windscreen	no
Cab+heating	Option
Anti -Stall (AST)	no
Hoods front/rear	thermof./ steel
Tyres Tractor	26x12.00-12
Size (WxLxh)	mm.1200x2470x2700
Weight	Kg. 1260



CASTLOADERS

45T/4WS

Engine	Diesel Isuzu
Power/cylinders	38 Hp. / 28Kw- 3 cylinders
Cooling	liquid
Transmission	hydrostatic - 4WD
Speed	16 km/h
Steering	articulated frame+4 wheel steering
Differential	electrical
Hydraulic outlet	66 l./min.
Boom height	mm. 3300
Joystick	standard
Selfleveling	standard
Working lights	2 front+ 1 rear
Safety protection	ROPS+FOPS
Windscreen	Standard
Cab+heating	Option
Anti -Stall (AST)	integrated
Hoods front/rear	steel
Tyres Skid	PR10 10/16,5
Size (WxLxh)	mm.1300x2600x3300
Weight	Kg. 2050



On request available with:
Independent Hydraulic System